

室内超宽频单极化全向吸顶天线

型号Model: HX-D203A-1XD




电气性能 ELECTRICAL SPECIFICATIONS


频率范围 Frequency Range (MHz)	380-520	698-960	1710-2700	3300-3700	4200-6000
天线增益Gain (dBi)	2.0	3.0	4.5	5.5	6.0
垂直面波束宽度HPBW _V (Deg.)	360	300	230	160	100
水平面波束宽度HPBW _H (Deg.)	200	160	100	60	50
三阶互调 Intermodulation IM3 (dBC)	≤-150(2*43dBm)				
极化方式 Polarization	L				
电压驻波比 VSWR	≤2.5	≤2	≤2	≤2	≤2
隔离度 Isolation (dB)	/				
输入阻抗 Impedance (Ω)	50				
接口形式 Connection Type	1*4.3-10 (female)				
耐功率 Max Input Power (W)	50				

机械特性 MECHANICAL SPECIFICATIONS

天线外形尺寸Antenna Dimensions(mm)	Φ266×20				
天线重量Antenna Weight (Kg)	0.5				
包装尺寸Package size (mm)	880×590×310(12PCS)				
包装重量Package weight(kg)	13.2				
天线颜色 Antenna Color	白色				
外罩材料 Radome Material	ABS				
工作温度Temperature Range (°C)	-40 ~ +70				
工作风速 Rated Wind Speed (km/h)	126				
安装方式 Mounting Type	吸顶安装				

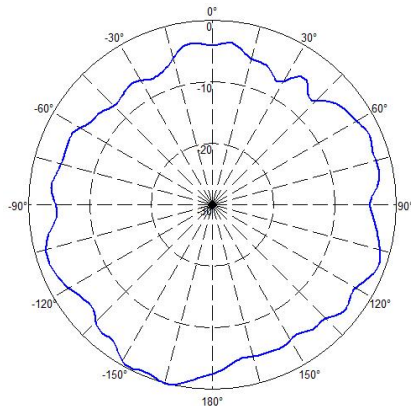

H面 方向图

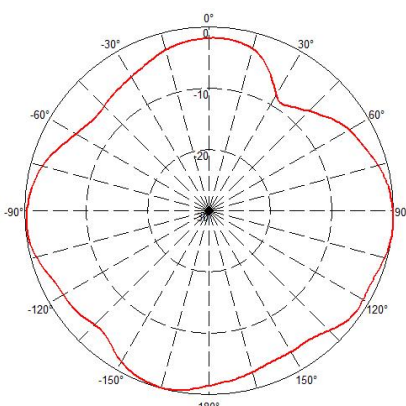

E面 方向图



广东浩信通信科技有限公司

地址: 广东省佛山市三水区白坭镇三水大道南100号



危险 Dangerous:



高空作业时, 操作人员一定要系好安全带, 戴好安全帽。
When working high above the ground, the operator must wear safety belts and helmets.



请穿戴防震和缓冲的鞋子, 请穿有长袖衬衫和橡胶手套的防护服。
Wear shoes with rubber soles and heels. Wear protective clothing including a long-sleeved shirt and rubber gloves.



请勿在雨前, 有风天气或者所在区域有闪电或雷声时安装, 请勿使用金属梯子。
Do not install on a wet or windy day or when lightning or thunder is in the area. Do not use metal ladder.



请勿安装在电源线附近, 电话线, 电话线和拉线不受限制, 任何导线都可能使人触电。
Do not install near power lines, telephone lines, and guy wires look the same. Assume any wire or line can electrocute you.