

室内双极化全向吸顶天线

型号Model: HX-D008X-2XD




电气性能 ELECTRICAL SPECIFICATIONS


频率范围 Frequency Range (MHz)	698-960	1710-2700	3300-4000
天线增益 Gain (dBi)	3.0	4.0	4.5
垂直面波束宽度HPBWV (Deg.)	90	85	55
三阶互调 Intermodulation IM3 (dBC)	≤-150(2*43dBm)		
极化方式 Polarization	线极化		
电压驻波比 VSWR	≤1.8	≤1.5	≤1.8
隔离度 Isolation (dB)	18	20	23
输入阻抗 Impedance (Ω)	50		
接口形式 Connection Type	2*4.3-10 (female)		
耐功率 Max Input Power (W)	50		
雷电保护 Lightning Protection	直流接地		

机械特性 MECHANICAL SPECIFICATIONS

天线外形尺寸 Antenna Dimensions (mm)	Φ210×55
天线重量 Antenna Weight (Kg)	0.35
包装尺寸 Package size (mm)	940×380×590 (30PCS)
包装重量 Package weight(kg)	18.7
天线颜色 Antenna Color	白色
外罩材料 Radome Material	PS
工作温度 Temperature Range (°C)	-40 ~ +70
工作风速 Rated Wind Speed (km/h)	126
安装方式 Mounting Type	吸顶安装

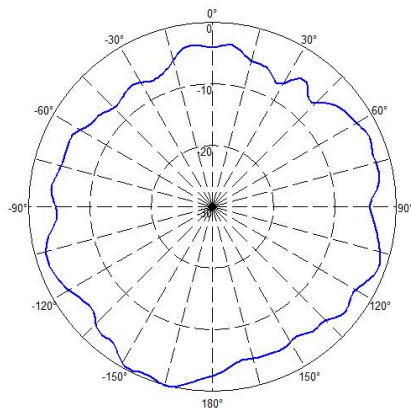

H面 方向图

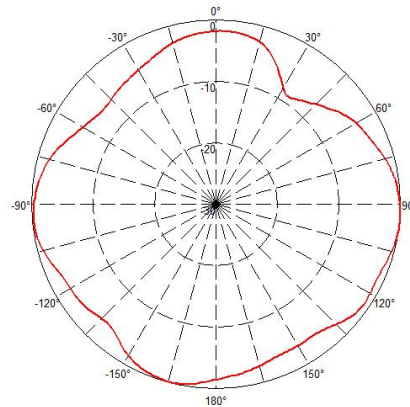

E面 方向图



广东浩信通信科技有限公司

地址: 广东省佛山市三水区白坭镇三水大道南100号

危险 Dangerous:

- 高空作业时, 操作人员一定要系好安全带, 戴好安全帽。
When working high above the ground, the operator must wear safety belts and helmets.
- 请穿鞋和戴绝缘的鞋子, 请穿有长袖衬衫和橡胶手套的防护服。
Wear shoes with rubber soles and heels. Wear protective clothing including a long-sleeved shirt and rubber gloves.
- 请勿在雨、雪、大风天气或者所在区域有闪电或雷声时安装, 请勿使用金属梯子。
Do not install on a wet or windy day or when lightning or thunder is in the area. Do not use metal ladder.
- 请勿安装在电源线附近, 电源线、电话线和拉线不要捆绑, 任何导线都可能引入雷电冲击。
Do not install near power lines. Power lines, telephone lines, and guy wires look the same. Assume any wire or line can electrocute you.