

# 室内双极化全向吸顶天线

型号Model: HX-D200B-4XD




## 电气性能 ELECTRICAL SPECIFICATIONS


频率范围 Frequency Range (MHz)	698-960	1710-2700	3300-4000
天线增益 Gain (dBi)	2.0	4.0	4.5
垂直面波束宽度HPBW <sub>v</sub> (Deg.)	90	50	40
三阶互调 Intermodulation IM3 (dBC)	≤-150(2*43dBm)		
极化方式 Polarization	线极化		
电压驻波比 VSWR	≤1.8	≤1.5	≤1.5
隔离度 Isolation (dB)	15	18	20
输入阻抗 Impedance (Ω)	50		
接口形式 Connection Type	4*4.3-10 (female)		
耐功率 Max Input Power (W)	50		
雷电保护 Lightning Protection	直流接地		

## 机械特性 MECHANICAL SPECIFICATIONS

天线外形尺寸 Antenna Dimensions (mm)	Φ358×25
天线重量 Antenna Weight (Kg)	0.8
包装尺寸 Package size (mm)	785×785×590(20PCS)
包装重量 Package weight(kg)	20.5
天线颜色 Antenna Color	白色
外罩材料 Radome Material	ABS
工作温度 Temperature Range (°C)	-40~+70
工作风速 Rated Wind Speed (km/h)	126
安装方式 Mounting Type	吸顶安装

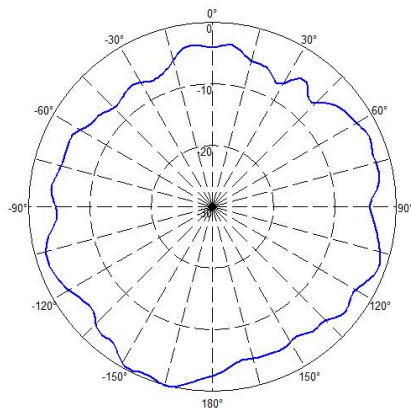

H面 方向图

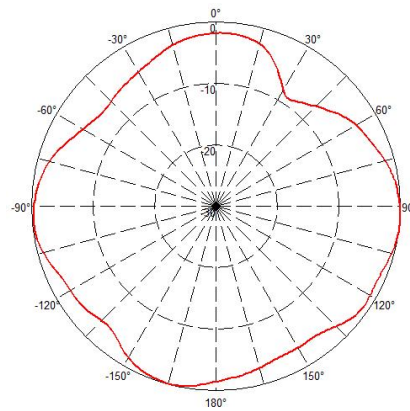

E面 方向图



广东浩信通信科技有限公司

地址: 广东省佛山市三水区白坭镇三水大道南100号

**危险 Dangerous:**

- 高空作业时, 操作人员一定要系好安全带, 戴好安全帽。  
When working high above the ground, the operator must wear safety belts and helmet.
- 请穿鞋和橡胶底的鞋子, 请穿长袖衬衫和橡胶手套的防护服。  
Wear shoes with rubber soles and heels. Wear protective clothing including a long-sleeved shirt and rubber gloves.
- 请勿在雨前, 有风天气或者所在区域有闪电或雷声时安装, 请勿使用金属梯子。  
Do not install on a wet or windy day or when lightning or thunder is in the area. Do not use metal ladder.
- 请勿安装在电源线附近, 电话线, 电话线和拉线外架附近, 任何导线都可能引入雷电冲击。  
Do not install near power lines, Power lines, telephone lines, and guy wires look the same. Assume any wire or line can electrocute you.